

ALIXO



Alixo Foot airco socles

The Alixo Foot range consists of multifunctional socles for outdoor units, piping and cabling on flat surfaces or flat roofs. The socles are made of SBR recycled rubber and have an embedded aluminium fixing profile. They have a temperature range between -40°C and +80°C and are available in various heights. Alixo High Foot & Alixo MAMUT are extra-high socles specifically designed for heat pumps. With their height of 150 or 230 mm, they are ideal for winter conditions.

Reasons for choosing Alixo Foot :

- ✓ *sturdy and 100% recycled tyre rubber (SBR)*
- ✓ *multifunctional and universally applicable*
- ✓ *possibility of anchoring in the ground*
- ✓ *UV-resistant, water-repellent and vibration-damping*
- ✓ *made in EU*

Alixo, 100% recycled tyre rubber !




The Alixo brand guarantees solid quality, maximum ease of maintenance, durability and fast assembly.



ALIXO

Alixo Foot

standard (H= 100 mm)



Alixo High Foot

high (H= 150 mm)



Alixo MAMUT

extra-high (H= 230 mm)



Alixo Foot

The standard Alixo Foot is available in 4 lengths according to the air conditioning unit to be installed. With a height of 100 mm, it suffices for all installations. The SBR recycled rubber is vibration- and sound-absorbing and features an embedded 40 x 21 mm aluminium profile suitable for all universal fixing accessories. For added safety, the plinths can be anchored into the ground (except ALX-1251).

- UV-resistant & water-repellent
- temperature range: -40°C to +80°C



Art. no.	info	dim. (LxWxH)	load*	pcs/pallet
Alixo Foot individual socles				
ALX-1251	Alixo Foot 250 mm	250 x 135 x 100 mm	80 kg	-
ALX-1241	Alixo Foot 400 mm	400 x 135 x 100 mm	130 kg	216
ALX-1211	Alixo Foot 600 mm	600 x 135 x 100 mm	195 kg	144
ALX-1221	Alixo Foot 1000 mm	1000 x 135 x 100 mm	320 kg	108
ALX-1900	set of insert nuts (2 pcs) M10 x 30 mm			
Alixo Foot socles in set including 4 insert nuts M10 x 30 mm				
ALX-1249	Alixo Foot 400 mm set: 2x ALX-1241 + 2x ALX-1900	400 x 135 x 100 mm	130 kg	40
ALX-1219	Alixo Foot 600 mm set: 2x ALX-1211 + 2x ALX-1900	600 x 135 x 100 mm	195 kg	50
ALX-1229	Alixo Foot 1000 mm set: 2x ALX-1221 + 2x ALX-1900	1000 x 135 x 100 mm	320 kg	40

*: static per socle (indicative)

Alixo High Foot & Alixo MAMUT

Alixo High Foot & Alixo MAMUT are extra-high socles specifically for heat pumps on flat surfaces or flat roofs. They have an embedded aluminium profile of 40 x 21 mm. With their height of 150 or 230 mm, they are ideal for use in winter conditions. Furthermore, they have the same features as the standard Alixo Foot.



Art. no.	info	dim. (LxWxH)	load*	pcs/pallet
Alixo High Foot & Alixo MAMUT individual socles				
ALX-1111	Alixo High Foot 600 mm	600 x 200 x 150 mm	300 kg	80
ALX-1131	Alixo High Foot 1200 mm	1200 x 200 x 150 mm	500 kg	56
ALX-1411	Alixo MAMUT 600 mm	600 x 200 x 230 mm	300 kg	40
ALX-1421	Alixo MAMUT 1000 mm	1000 x 200 x 230 mm	500 kg	24
ALX-1900	set of insert nuts (2 pcs) M10 x 30 mm			
Alixo High Foot & Alixo MAMUT socles in set including 4 insert nuts M10 x 30 mm				
ALX-1119	Alixo High Foot 600 mm set: 2x ALX-1111 + 2x ALX-1900	600 x 200 x 150 mm	300 kg	-
ALX-1419	Alixo MAMUT 600 mm set: 2x ALX-1411 + 2x ALX-1900	600 x 200 x 230 mm	300 kg	-


*: static per socle (indicative)



Alixo Universal Foot & Alixo Brick

The Alixo Universal Foot & Alixo Brick are ideal for supporting various types of pipes and cables. Thanks to the metal inserts, mounting rails or cable supports (available seperately) can be easily fixed. These socles are made of SBR recycled rubber.

- with 1 or 3 M8 (Universal Foot) or M6 (Brick) metal inserts, warm galvanised metal
- the Alixo Universal Foot has a notch for a mounting rail
- the Alixo Brick is flat at the top and fitted with M6 inserts to which cable trays can easily be attached
- optional matching protection (ALX-1952) mat in TPO for PVC/TPO roofs



1 or 3 metal M8 or M6 inserts



Art. no.	info	dim. (LxWxH)	inserts	load*
Alixo Universal Foot				
ALX-1000	Alixo Universal Foot 120	120 x 190 x 95 mm	1x M8	90 kg
ALX-1001	Alixo Universal Foot 240	240 x 190 x 95 mm	3x M8	120 kg
Alixo Brick				
ALX-1080	Alixo Brick 110	110 x 110 x 80 mm	1x M6	90 kg
ALX-1003	Alixo Brick 250	250 x 135 x 80 mm	3x M6	90 kg
ALX-1952	TPO protection mat	300 x 250 x 1,5 mm	-	-


*: static per socle (indicative)



Alixo Framefoot

The Alixo Framefoot made of recycled HDPE serves to support ventilation channels, pipes and ducts. For this, it needs to be fitted with profiles 40 x 41 mm (not included). The integrated anti-vibration mat ensures smooth and universal application.

- with or without fixation kit
- for profile 40 x 41 mm (not included)
- version available with support for fixing mounting rails
- waterproof

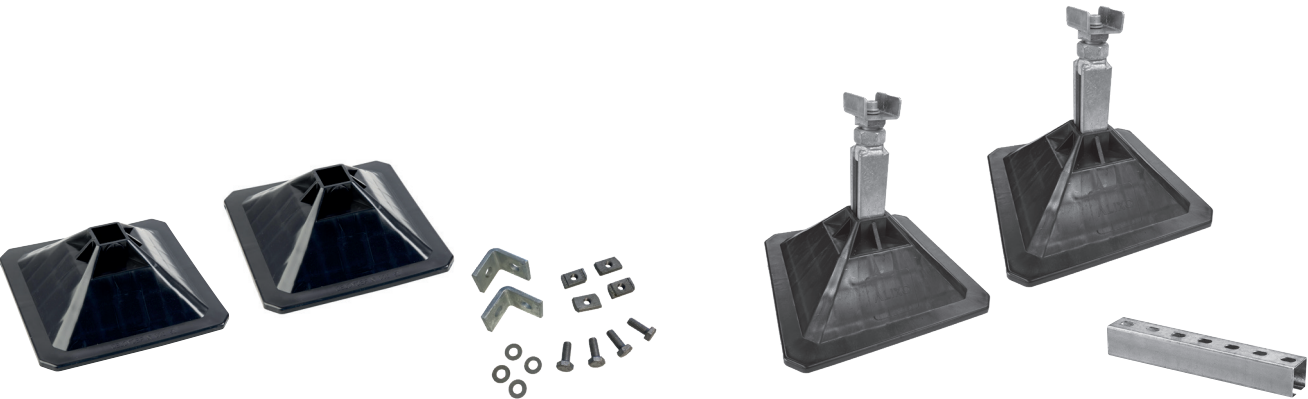

Art. no.	info	dim. base	height	load*
Alixo Framefoot				
ALX-1803	Alixo Framefoot set with fixation kit (set of 2 feet with fixations)	305 x 305 mm	120 mm	175 kg
ALX-1804	Alixo Framefoot set without fixation kit (set of 2 feet without fixations)	305 x 305 mm	120 mm	175 kg
ALX-1908	fixation kit (2 L-hooks + 4 bolts M10x25 (with washers) TVZ + M10 sliding nuts TVZ			
Alixo Framefoot for fixing mounting rails				
ALX-1840	Alixo Framefoot set for fixing mounting rails (set of 2 feet with support and fixations)	305 x 305 mm	225 - 350 mm	175 kg
Alixo profiles				
ALX-1822	sendzimir galvanised profile 40 x 41 x 2,5 mm - L = 2 m			
ALX-1823	sendzimir galvanised profile 40 x 41 x 2,5 mm - L = 3 m			

*: static per foot (indicative)

ALIXO

we support your hvac installations



www.alixo.eu